





**Published:**

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

A communications terminal, a system and a method for Internet/network telephony

5 This invention relates to an electronic portable communications terminal for Internet/network telephony.

The invention also relates to a system for Internet/network telephony and to a method for the same.

10 The invention additionally relates to a computer-readable medium comprising a program which may be caused to execute the method of the invention on one or more computers or CPUs.

15 Telephony via the Internet (IP telephony) is a very low-cost alternative to ordinary telephony, in particular over long distances. Such systems convert the speech information into and from a suitable digital format, which is divided into data packets that are transported  
20 via the Internet itself, the actual transport via the Internet being typically at a fixed price.

Moreover, IP telephony may also be used for communication with a stationary conventional telephone coupled to the  
25 existing telephone network, as the Internet may be used for transmitting data to a local gateway which is connected to the existing public switched telephone network (PSTN). Thus, the user need just pay a local telephone charge even for long distance calls, as the  
30 Internet is used for the transport of data to the gateway/location concerned.

Such IP telephony systems/solutions will undoubtedly become more attractive as more and more people get access

CONFIRMATION COPY

to the Internet and/or are connected in networks, and as the supply of fixed charge, free, permanent and broadband solutions in connection with the Internet and/or other networks gets greater.

5

Patent publication WO 00/51375 discloses a communication system where a dual-mode device is capable of both cell phone communication and telephone communication on a IP LAN/network. The dual-mode device connects to the  
10 LAN/network either via a cable connecting directly to the LAN/network or a cable connecting to a wireless communication device in wireless communication with a wireless LAN/network. The establishment of a connection to the LAN/network is troublesome since a cable is used  
15 and restricts the movement of the user when the dual-mode device is being used and requires for special equipment at the connecting point in the case of a wireless LAN/network.

20 Additionally, the support of both communication formats causes the dual-mode device to be of a complicated and more expensive design with a relative large power usage.

Patent Publication WO 98/57508 relates to a system for  
25 wireless communication via a DECT terminal and a base station, such as e.g. a digital wireless telephone connected to a base station. The system uses the IP protocol for passing on digital speech information via the Internet between various base stations (DECT  
30 islands), so that a given DECT terminal will receive a call at the base station at which the terminal is present. This provides increased mobility, as the terminal may be used at other base stations.

A gateway (GW) constitutes the very interface to the DECT base station and handles the conversion of telephone numbers into IP addresses, as the DECT terminal itself does not know its IP address which must be unique.  
5 Further, the DECT terminal(s) has to be known, identified and/or paired beforehand with the base station in order to establish communication.

Patent Publication WO 99/38311 relates to a system and a  
10 corresponding method of providing a wireless RF (Radio Frequency) interface between one or more terminals and an Internet Protocol (IP)/Internet telephone system, so that the terminals may be used for telephony via the Internet. The system uses a base station which partly handles and  
15 controls the distribution of information to the various terminals and partly handles the access to the Internet, which means that the base station controls/contains the relevant protocols inter alia in connection with the Internet.

20 Further, a terminal associated with a given base station cannot readily be used in connection with another base station, as the base station must know the number of terminals in order to allocate to each terminal its  
25 unique frequency and/or jump frequency for use in communication, so that the correct information is received/transmitted by the correct terminal.

The two above-mentioned systems both have the drawback  
30 that they require a specialized type of equipment (base station, gateway, etc.), which is a great obstacle to the flexibility with respect to mobility and updating/expansion of functionality, since the specialized equipment must be physically present at every

single location where the terminals are contemplated for use.

5 An object of the invention is to provide a communications terminal which uses a network and/or the Internet for transferring information/data representing digitized speech, sounds, music, etc.

10 Another object of the invention is to provide a communications terminal which increases the flexibility with respect to wireless communication/connection with a network and/or the Internet.

15 A further object of the invention is to provide a communications terminal which does not need specialized equipment and functionality to provide a connection to a network and/or the Internet.

20 Still a further object of the invention is to enable flexibility with respect to functionality.

25 Yet another object is to provide a communications terminal enabling relative simple design, small size, and relative low/reduced power consumption.

These objects, among others, are achieved by an electronic portable communications terminal for Internet/network telephony comprising

- 30
- audio means adapted to reproduce sound on the basis of a first electrical signal and to record sound resulting in a second electrical signal,
  - converting means adapted to convert said second electrical signal into transmission data, representing sound for transmission, in a suitable

data format, and to convert received data, representing received sound, in said suitable data format into said first electrical signal, and

- protocol means adapted to handle and control communication of said received and transmission data in accordance with a standardized Internet/network protocol, such as e.g. TCP/IP, thereby embedding and extracting said transmission and received data, respectively, in a data packet format,

wherein said terminal further comprises

- wireless communications means for wireless near field communication of said received and/or transmission data in a wireless data format with a connecting unit adapted to establish a connection to a network and/or the Internet according to said standardized Internet/network protocol, where the wireless communications means is further adapted to
- embed/extract packets of said data packet format in/from said wireless data format.

A portable communications terminal is achieved hereby which provides telephony via a network or the Internet, which gives a considerable economic advantage.

- 25 The communications terminal establishes a wireless connection to a connecting unit which establishes a connection to the relevant network.

In addition, a communications terminal is provided which can independently control and communicate data packets according to a standardized Internet/network protocol such as e.g. the TCP/IP protocol. This makes it possible to use simplified standardized equipment, which must merely be capable of establishing a connection to a given

network and/or the Internet. The wireless connection is just used for transferring the data packets to the connecting unit in an expedient manner.

- 5 In this way a terminal according to the invention may be used for Internet telephony, if just it is in the vicinity of standardized equipment allowing the set-up of a network and/or Internet connection. The local handling of the IP protocol also makes it easier to use the
- 10 terminal in connection with "foreign" connecting units, since a configuration will be considerably easier and can be made automatically in certain types of wireless protocols.
- 15 Also provided is the option of dynamic allocation of a useful IP address via the protocol means, as a valid IP address for a given session (i.e. communication) may be allocated to the communications terminal. This results in even greater mobility, as the allocation may take place
- 20 in dependence on the connecting unit with which the wireless connection is established, since the protocol means are present in the terminal itself. A user would be capable of receiving and transmitting a call regardless of the specific location as long as there is
- 25 Internet/network access.

It is moreover ensured that the handling and functionality of several terminals are facilitated considerably, since e.g. a central database can relate

30 unique and fixed addresses to users of the terminals, i.e. a local unique address is related to a temporary IP-address. An example of a local unique address may be the unique 48-bit address used in the Bluetooth protocol, a telephone number, etc.

Additionally, since only communication means for near filed communication needs to be present, i.e. no other communication means like cellular communication means, etc., a relative low complexity and power consumption is obtained and a relatively small size of the terminal is made possible thereby making is very suitable for wearing and/or carrying by a user.

10 Preferably, the wireless data format is a Bluetooth data format.

In a preferred embodiment, said terminal is adapted to communicate additional information and/or data with said connecting unit, wherein said additional information and/or data comprises one or more of:

- an IP address of a communication receiver,
- an IP address of a communication transmitter/said terminal
- an IP address of at least one connecting unit,
- an IP address of a service server,
- TCP/IP packets,
- speech mails,
- commercials,
- music,
- stock exchange and financial news
- chat-lines,
- chat-rooms,
- telephone meetings.

Relevant information may be sent in this way together with the transmitted speech information, whereby various

functionalities may be provided, optionally in dependence on a user profile.

5 In a preferred embodiment, said terminal is adapted to establish a connection to a service server on said network and/or the Internet via the connecting unit, so that information concerning a desired communication receiver may be transferred to the server, said server being adapted to pass on information concerning the IP address  
10 of the desired communication receiver and/or to provide a direct connection between the desired communication receiver and a communication transmitter/said terminal.

15 Hereby, a central server can keep track of which terminals are accessible and where, so that a user wishing to make a call is merely to know an alias, a nickname, the IP address, etc. of the user whom it is desired to contact.

20 In a further embodiment, said terminal comprises speech recognition means adapted to analyze and interpret said sound for recording and/or said transmission data to identify one or more commands.

25 This makes the terminal easier to operate for a user, and the physical dimensions of the terminal itself may be reduced, as operating buttons, etc. can be avoided completely or reduced greatly in numbers.

30 In an embodiment, said communications means for near field communication are adapted to communicate in the form of one or more of:

- an RF communications protocol such as e.g. Bluetooth, DECT, etc.,
- an infrared communications protocol, or
- another wireless communications protocol.

5

In an embodiment, said suitable data format is a compressed data format. This provides a better/optimal utilization of the available bandwidth on the network and/or the Internet used, as the data packets/the digital  
10 information are/is compressed prior to transmission.

In a preferred embodiment, said terminal is an ear telephone which comprises means for capturing sound for said recording via the cheekbone and the soft tissue in the  
15 auditory canal of a user. Alternatively, the terminal comprises means for capturing sound via a boom microphone.

This provides a very discrete, compact and hands-free or  
20 minimally hand-operated communications terminal of a small physical size. An example of an ear telephone that may be used in connection with the present invention is disclosed in the European Patent Application EP 0 673 587 incorporated herein by reference.

25

In another preferred embodiment, the terminal is a headset comprising a housing comprising the converting means, the wireless communication means, and the protocol means, an earpiece secured to the housing comprising  
30 means for reproducing sound on the basis of the first electrical signal, a brace secured to the housing at one end and with a sound capturing unit for capturing sound for transmission in the form of a second electrical signal located at the other end of the brace, thereby

allowing for easy carrying and use of the terminal and providing a very discrete, compact and hands-free or minimally hand-operated communications terminal of a small physical size.

5

In one embodiment the headset also comprises a second brace, spring, arm, etc. secured to the housing which may stabilises and secures the headset to a user's head by being adapted to engage the user's ear.

10

A further object of the invention is to provide a system which has the above-mentioned advantages and accomplishes the above-mentioned objects.

15 This is achieved by a system for Internet telephony, said system comprising

- a portable communications terminal according to one or more of the above embodiments,
- 20 • a connecting unit adapted to establish a connection to a network and/or the Internet,
- a service server connected to the Internet and/or a network, said server comprising one or more databases comprising information related to potential desired  
25 communication receivers and/or transmitters, said server being adapted to pass on information concerning the IP address of a desired communication receiver and/or establish a direct connection between the desired communication receiver and a communication transmitter/said terminal.  
30

A system is achieved hereby wherein a central service server can handle and control the connection between a large number of users. Further, also the option of fur-

ther functionality is provided, e.g. in the form of news, reading of mails, speech mails, commercials, music, stock exchange and financial news, etc., which may be transmitted to a user of the system, e.g. depending on a user profile. Moreover, it is possible to provide functionalities, such as chat-lines, chat-rooms, telephone meetings, etc., where several terminals/users can communicate with each other so that everybody can hear what everybody says.

10

In an embodiment, the system additionally comprises speech recognition means adapted to analyse and interpret data representing sound to identify one or more commands. Speech recognition may be achieved hereby without necessarily having them placed in a terminal according to the invention, which is a great advantage since speech recognition requires relatively great resources of processor power and storage capacity.

15

20 A further object of the invention is to provide a method and embodiments thereof enabling the same possibilities and the same advantages as are provided by the embodiments of the communications terminal described above.

25 This is achieved by a method for Internet/network telephony comprising the steps of

- reproducing sound on the basis of a first electrical signal and recording sound resulting in a second electrical signal,
- 30 • converting said second electrical signal into transmission data, representing sound for transmission, in a suitable data format, and converting received data, representing received sound, in said suitable data format into said first electrical signal, and

- handling/control of communication with said received and transmission data in accordance with a standardized Internet/network protocol, such as e.g. TCP/IP, and embedding and extracting said transmission and received data, respectively, in/from a data packet format according to said standardized Internet/network protocol,  
5 wherein the method further comprises
  - wireless near field communication of said received and/or transmission data in a wireless data format with a connecting unit adapted to establish a connection to a network and/or the Internet according to said standardized Internet/network protocol  
10
  - embedding/extracting packets of said data packet format in/from said wireless data format.  
15

In an embodiment, said method communicates additional information and/or data with said connecting unit, and said additional information and/or data comprises one or more of:  
20

- an IP address of a communication receiver,
- an IP address of a communication transmitter/said terminal,  
25
- an IP address of at least one connecting unit,
- an IP address of a service server,
- TCP/IP packets,
- speech mails,
- commercials,  
30
- music,
- stock exchange and financial news,
- chat-lines,
- chat-rooms,

- telephone meetings.

In a further embodiment, said method establishes a connection to a service server on said network and/or the Internet via said connecting unit, so that information concerning a desired communication receiver may be transferred to the server, said server being adapted to pass on information concerning the IP address of the desired communication receiver and/or to establish a direct connection between the desired communication receiver and a communication transmitter/said terminal.

In another embodiment, said method comprises speech recognition for analysis and interpretation of said sound for recording and/or said transmission data to identify one or more commands.

In still another embodiment, said communications means for near field communication communicate in the form of one or more of:

- an RF communications protocol such as e.g. Bluetooth, DECT or the like,
- an infrared communications protocol, or
- another wireless communications protocol.

In an embodiment, said suitable data format is a compressed data format.

In one embodiment, the method is used in an ear telephone which comprises means for capturing sound for said recording via the cheek-bone and the soft tissue in the auditory canal of a user.

In one embodiment, the method is used in a headset comprising a housing comprising converting means, wireless communication means, and protocol means, an earpiece secured to the housing comprising means for  
5 reproducing sound on the basis of the first electrical signal, a brace secured to the housing at one end and with a sound capturing unit for capturing sound for transmission in the form of a second electrical signal located at the other end of the brace.

10

The invention additionally relates to a computer-readable medium comprising a program written thereon, wherein the program, when being executed, causes the computer to perform the method according to the present invention.

15

The computer-readable medium may be a suitable volatile nor non-volatile medium, such as e.g. a CD-ROM, a magnetic disc, a ROM circuit, a network connection or generally any other medium which can provide a computer  
20 system with information on how instructions/commands are to be performed/executed.

The invention will be explained more fully below with reference to the drawing, in which

25

Figure 1 shows a schematic block diagram of a communications terminal according to an embodiment of the invention;

30 Figure 2a illustrates a system according to the invention in which two communications terminals and a service server are shown;

Figure 2b illustrates the system according to the invention in which another type of connecting unit is shown;

5 Figure 2c illustrates the system according to the invention in which a user connected to the traditional telephone network (PSTN) is shown;

10 Figures 3a and 3b illustrates a flowchart of an embodiment of the method according to the invention;

Figure 4 shows a preferred embodiment of a communications terminal according to the invention;

15 Figure 5 shows a perspective view of an alternative preferred embodiment of a communications terminal according to the invention.

20 Figure 1 shows a schematic block diagram of a communications terminal (100) according to an embodiment of the invention. Shown schematically in the figure are audio means (101) e.g. in the form of some type of loudspeaker, sound generator, transducer, etc., and some type of microphone, transducer or other sound capturing unit.

25 The audio means (101) are used for playing/reproducing received sound information, such as e.g. speech, music, etc., in the form of a first electrical signal, and for capturing sound for transmission in the form of a second electrical signal, respectively.

30 Also shown are converting means (102) which convert the second electrical signal into a suitable digital sound format suitable for transmission. The converting means (102) also convert received sound data in the suitable

digital sound format into the first electrical/analog signal prior to playing via the loudspeaker, sound generator, transducer, etc.

- 5 The converting means (102) comprise A/D and D/A converters and/or a codec (coder and decoder) for converting between analog and digital sound. If a codec is used, the digitized data may be compressed so that the amount of data to be transmitted and received is reduced considerably.
- 10

The suitable digital sound format may e.g. be raw data, ADPCM, DTMF, PCM, Wav, MP3 and other suitable digital sound formats, and several formats may e.g. be supported at the same time. Additionally, e.g. also one or more streaming sound/audio formats might be supported in the converting means (102).

15

The converting means (102) are connected to protocol means (103)/a protocol stack which provide for the handling of data/information in connection with transmission and reception of data. The protocol which is preferably used is the TCP/IP (Transmission Control Protocol/Internet Protocol) suit of protocols e.g. including PPP (Point-to-Point Protocol). The IP protocol part provides for the actual handling of data in the form of splitting or collection of the digital information in data packets as well as handling of receiver and transmitter information (in the form of IP addresses), while the TCP protocol part provides for the actual handling of the connection between receiver and transmitter.

20

25

30

The protocol means (103) may e.g. be comprised by a special- and/or general-purpose microprocessor, logic circuit, etc.

- 5 The protocol means (103) are connected to wireless communications means (104), which receive digitized sound/data in the form of IP packets from the protocol means (103) via an aerial, antenna, etc. (106), for further wireless transmission. The communications means  
10 (104) also receive wireless data which are transmitted to the protocol means in the form of IP packets for further processing and playing via the converting means (102) and the audio means (101)/loudspeaker/sound generator.
- 15 The information which the communications means (104) receive or are to transmit, is typically embedded in a suitable format. So in this case the IP packets are embedded in a transmission format in accordance with wireless communication protocol e.g. also embedded in a  
20 packet format.

- Preferably, the communications means (104) use an RF (Radio Frequency) connection in accordance with e.g. Bluetooth, DECT, IEEE802.11 or other wireless protocols.
- 25 Bluetooth is especially advantageous for portable terminals since it is designed with low power consumption in mind. Alternatively, also infrared wireless communications protocols may be used.

- 30 The communications terminal (100) also comprises a calculating/processing unit, such as a CPU, microprocessor or the like, for controlling and coordinating the various parts. Preferably, the microprocessor (105) is connected to one or more memory elements (not shown), such as e.g.

RAM, Flash, ROM, etc., for storage and provision of relevant information. In an alternative embodiment, the microprocessor (105) and the protocol means (103) is comprised in a single microprocessor unit.

5

That the terminal (100) contains protocol means (103) for handling/control allows the use of simplified standardized connection/coupling equipment, which must merely be capable of establishing a connection to a given  
10 network and/or the Internet, and the local handling of the IP protocol also makes it easier to use the terminal (100) in connection with "foreign" connecting units, since a configuration is considerably easier and may be made automatically in certain types of wireless  
15 protocols. The only requirement is the same RF communication system in the terminal and connection/coupling equipment with access to the Internet/a network.

20 In an alternative embodiment, the terminal (100) also comprises speech recognition means e.g. implemented via the microprocessor (15) and/or implemented via specialized hardware, so that the terminal (100) may be operated hands-free in case of spoken commands.  
25 Additionally/alternatively, the terminal comprises one or more operating means like buttons, switches, etc.

The terminal (100) also comprises an energy/power source (not shown) like one or more batteries.

30

Figure 2a illustrates a system according to the invention where two communications terminals (200; 200') and a service server (210) are shown. The figure illustrates how two users (201; 201') are interconnected via the

communications terminals (200; 200') according to the invention.

5 The terminals (200; 200') are illustrated in the figure as a preferred embodiment, both in the form of an ear telephone which will be explained more fully in connection with Figure 4.

10 An alternative preferred embodiment of a terminal (200; 200') is explained in connection with Figure 5.

The figure just shows two users (201; 201') for clarity, but in practice a much larger number of users will be connected to the system at the same time.

15 Each terminal (200; 200') is connected to the Internet (220) and/or another network, such as e.g. a local network or intranet in a company, household, etc. via a connecting unit (202; 202'). The connecting units (202; 202') are equipped with a wireless communications module/a transceiver (203, 203'), such as e.g. a Bluetooth module or the like, so that a wireless communications link is established between a given connecting unit (202; 202') and a given terminal (200; 200').

Several users (201; 201') may also be connected to the same wireless communications module/the same transceiver (203; 203').

30

The connecting units (202; 202') may e.g. be a standard computer, PDA, a mobile telephone etc. with Internet connection, preferably a broadband connection.

The system additionally comprises one or more service servers (210) likewise connected to the Internet/network (220). The service server (210) comprises one or more databases (211) where relevant information concerning the  
5 users (201; 201') of the system is saved.

The database (211) comprises information such as e.g. one or more user aliases per user (201; 201') and associated current IP addresses. The IP addresses may either be  
10 static (e.g. if the user (201; 201') is connected to a company network) or dynamic, where an IP address is allocated to the user (or rather the terminal (200; 200')) each time the user (201; 201') connects to the system.

15 The server can thus keep track of which terminals (200; 200')/users (201; 201') are accessible and where.

The service server (210) additionally comprises at least one router (212) which establishes the connection between  
20 users (201; 201') who have wanted contact.

The service server (210) may also be used for contributing additional services, functions, etc., such as e.g. news, reading of mails, speech mails, commercials, music,  
25 stock exchange and financial news, etc., which may be sent to a user (201; 201') of the system, e.g. depending on a user profile.

A further functionality that may be provided by the  
30 server (210) is a chat-line, chat-rooms, telephone meetings, etc., where several terminals (200; 200')/users (201; 201') are given the opportunity of communicating with each other so that everybody can hear what everybody says.

Another/a further option might be that the user profile comprises a "negative list" of persons with whom no contact is desired.

5

The system operates in that when e.g. a first user (201) wants to talk to a second user (201'), the first user (201) indicates this on the portable communications terminal (200). This indication may take place by keypad entering, voice command, etc. of an alias, an IP address or the like of the second user (201').

10

The terminal (200) establishes a connection via the wireless connection to the transceiver (203), the connecting unit (202) and the Internet (220), where e.g. the alias of the user (201') is transmitted. The server (210) checks whether the second user (201') with the forwarded alias is accessible/online and, if so, obtains a current IP address of the second user (201'). Then a two-way connection is established between the first user (201) and the second user (201') via the router (212).

15

20

Alternatively, the current IP address of the second user (201') may be sent back to the first user's (201) terminal (200), thereby allowing a direct two-way connection to be established between the terminals (200) and (200').

25

After the connection has been established, the Internet (220) is used for transporting speech between the two users (201; 201') in a suitable digital format in IP packets, as described in connection with Figure 1.

30

If the terminal (200; 200') and/or the service server (210) supports speech recognition, the operation of the

terminal (200; 200') may be simplified, and specific commands related to the service server may be passed on to the server (210) either for interpretation here or as one or more binary commands, a query or the like.

5

Alternatively, the connecting unit (202; 202') may be a mobile telephone adapted to be connected to the Internet (220) e.g. via a broadband connection equipped with e.g. Bluetooth or DECT functionality or other suitable wireless connections. Hereby, the user (201; 201') is given an even greater mobility and also the economic savings of IP telephony, as the long distance traffic takes place via the Internet (220). The mobile telephone may e.g. be of the type GSM, GPRS, etc. or of another suitable type.

15

Figure 2b illustrates the system according to the invention, where another type of connecting unit is shown. This figure corresponds to Figure 2a, but with the difference that the second user's (201') connecting unit is now formed by a gateway (230). The gateway (230) provides coupling possibilities for several terminals (200; 200')/users (201; 201') e.g. in a local network, intranet, a household, a block of flats, etc.

20

Alternatively, the gateway (230) may be provided/incorporated in a refrigerator, a television set e.g. via cable or satellite, or other household devices providing the possibility of access to the Internet. Preferably, a gateway (230) with broadband possibility is used, e.g. via ISDN, ADSL, Frame Relay, xDSL, etc.

25

Figure 2c illustrates the system according to the invention where a user coupled to the traditional telephone

network (PSTN) is shown. This figure corresponds to Figures 2a and 2b with the difference that the second user's (201) connecting unit is now formed by a PSTN interface/gateway (240) coupled to the user's (201') ordinary standard telephone (241). It is hereby also possible to reach users on the traditional telephone network.

Figure 3a illustrates a flowchart of an embodiment of the method according to the invention.

10

In step (301), a wireless connection is established between a communications terminal, such as e.g. an ear telephone, a headset, etc. and a connecting unit, such as e.g. a computer, mobile telephone, Internet access point, PDA or the like providing the possibility of establishing a connection to the Internet or a connection to another network.

In step (302), the terminal transmits information using the TCP/IP protocol to a service server, coupled to the Internet/network via the connecting unit, regarding the identity of the user (alias, etc.), regarding whether the user is online (wants to be available for calls), and regarding the physical IP address at which the terminal may be reached. This information is stored/updated in one or more databases at the server.

Then, optionally in accordance with a user profile, the server can transmit data and information, such as news, reading of mails, speech mails, commercials, music, stock exchange and financial news, etc. to the user.

A check is made in step (303) as to whether the user wants to contact another user.

If so, a request is sent in step (304) to the server comprising e.g. an alias of the user whom it is desired to contact. The service server checks whether a user  
5 having this alias exists, whether the person concerned is online, and, if so, at which physical IP address this other user can be reached.

If this is not desired, then idle mode is resumed, and  
10 the check (303) is performed currently by interrupt, polling, etc. Other functions may be carried out in idle mode.

Then a connection is established in step (305) between  
15 the first and second users, following which the actual conversation can begin. The connection is preferably a TCP/IP connection either via the service server or directly. If the connection is direct a new/another TCP/IP connection has to be established between the to  
20 conversation participants and if the connection is via the server the TCP/IP connection established in step (301) may be used.

In steps (306) - (308), the data received from the second  
25 user are handled and played, but recording of sound and transmission of it to the second user take place in steps (309) - (311). These steps may be performed either simultaneously/parallel or alternating e.g. by multiplexing, etc.

30

In step (306), data are received via the wireless interface in the form of IP packets. The embedded sound data/information in the IP packets are/is converted into a first analog sound signal in step (307), e.g. by a D/A

converter, codec, etc., and then it is reproduced/played for the user in step (308) e.g. via a loudspeaker, sound generator, etc.

- 5 In step (309), sound is captured by a microphone, a transducer, etc. in the form of a second electrical signal, which is converted via an A/D converter, codec, etc. into a digital signal in step (310). The information of this digital signal is split and embedded in IP  
10 packets by TCP/IP protocol means which is RF modulated (e.g. the IP packets are converted/embedded in packets according to the used RF protocol by wireless/RF communications means), and then the packets are transmitted to the second conversation partner via a  
15 transceiver receiving the RF packets and extracting the IP packets and transmitting the extracted IP packets via the Internet/the network to the second conversation partner.
- 20 These steps (306 - 308; 309 - 311) are repeated until the conversation has been terminated.

After the conversation has been terminated, which is checked in step (312), the system returns to idle mode in  
25 step (303) and waits for a new call (either incoming or outgoing).

The steps of receiving a call, shown in Figure 3b; is similar to the steps in Figure 3a where an incoming call  
30 is detected and the user may have the option of accepting or refusing the call. If the call is accepted a TCP/IP connection between the caller and the receiver is established either directly or via a service server and steps like (306 - 311) are performed. If a call is

refused the terminal returns to idle mode. Preferably, the method comprises the steps of (301 - 302), a test (303) of whether an incoming and/or outgoing call is detected, and the steps (304 - 312) where step (304) only  
5 is executed for outgoing calls.

Figure 4 shows a preferred embodiment of a communications terminal according to the invention. An ear telephone (400) is shown in the figure. The ear telephone (400) is  
10 preferably moulded and can be manufactured individually in conformity with the user's ear. Shown is a sound generator (401), such as e.g. a loudspeaker which is used for reproducing sound information received via wireless communications means (not shown), as explained above.  
15 Also shown is some type of microphone, transducer or other sound capturing unit (shown in part) with a rubber coating (402) for sound capture and generation of a second electrical signal.

20 The functionality of the ear telephone corresponds to the terminal described in connection with Figure 1 and the system.

This provides a very discrete, compact and hands-free or  
25 minimally hand-operated communications terminal of a small physical size e.g. 5-8 cm<sup>3</sup>.

Alternatively, the wireless communications means may be arranged externally of the ear telephone (400) itself and  
30 e.g. be positioned in a housing which may be secured to the body of the user, e.g. in the belt. The housing and the ear telephone are then merely to be connected, e.g. via a wire or other wireless communications means which need a smaller range than the wireless communications

means for communication with the connecting unit, and can therefore have a smaller physical size, smaller energy consumption, etc.

- 5 For further details of an example of an ear telephone reference is made e.g. to the European Patent Application EP 0 673 587.

10 Figure 5 shows a perspective view of an alternative preferred embodiment of a communications terminal according to the invention. Shown is very compact headset (500) comprising a microphone, transducer, or other sound capturing unit (505) for capturing sound for transmission in the form of a second electrical signal, where the  
15 sound capturing unit (505) is located at one end of a brace, arm, boom, etc. (504) so that the sound capturing unit may conveniently be placed in close proximity of a user's mouth. The other end of the brace, arm, boom, etc. (504) is secured to a, preferably watertight, container,  
20 housing, etc. (502) comprising the electronic elements/parts (except audio means) described in connection with Figure 1.

A brace, spring, arm, etc. (501) is also shown secured to  
25 the housing (502) which may be used to stabilise and secure the headset (500) to a user's head.

The headset (500) also comprises an aerial, antenna, etc. (not shown) used for wireless communication and operating  
30 means (506) like one or more buttons, switches, etc. e.g. used for accepting/refusing calls. The aerial may be an intern aerial located in the housing (502). Alternatively, the brace, arm, boom, etc. (504) may constitute the aerial.

Secured to the housing (502) is an earpiece (503) that  
may be moulded and manufactured individually in  
conformity with a user's ear, to be inserted into the  
5 user's ear. The earpiece comprises a sound generator,  
etc. for playing the received sound in the user's ear.

Hereby, a very discrete, compact and hands-free or  
minimally hand-operated communications terminal of a  
10 small physical size is obtained.

## Patent Claims:

1. An electronic portable communications terminal (100; 200; 400; 500) for Internet/network telephony comprising
  - 5 • audio means (101) adapted to reproduce sound on the basis of a first electrical signal and to record sound resulting in a second electrical signal,
  - converting means (102) adapted to convert said second electrical signal into transmission data,  
10 representing sound for transmission, in a suitable data format, and to convert received data, representing received sound, in said suitable data format into said first electrical signal, and
  - protocol means (103) adapted to handle and control  
15 communication of said received and transmission data in accordance with a standardized Internet/network protocol, such as e.g. TCP/IP, thereby embedding and extracting said transmission and received data, respectively, in/from a data packet format according  
20 to said standardized Internet/network protocol,  
c h a r a c t e r i z e d in that said terminal further comprises
  - wireless communications means (104) for wireless near  
25 field communication of said received and/or transmission data in a wireless data format with a connecting unit (203; 203') adapted to establish a connection to a network and/or the Internet (220) according to said standardized Internet/network protocol, where the wireless communications means  
30 (104) is further adapted to
  - embed/extract packets of said data packet format in/from said wireless data format.
2. A terminal according to claim 1, c h a r a c t e r -

i z e d in that said terminal is adapted to communicate additional information and/or data with said connecting unit, and that said additional information and/or data comprises one or more of:

- 5     • an IP address of a communication receiver,
- an IP address of a communication transmitter/said terminal,
- an IP address of at least one connecting unit,
- an IP address of a service server,
- 10    • TCP/IP packets,
- speech mails,
- commercials,
- music,
- stock exchange and financial news,
- 15    • chat-lines,
- chat-rooms,
- telephone meetings.

3. A terminal according to claims 1 - 2, c h a r a c -  
20 t e r i z e d in that said terminal is adapted to establish a connection to a service server on said network and/or the Internet via said connecting unit, so that information concerning a desired communication receiver may be transferred to the server, said server being adapted  
25 to pass on information concerning the IP address of the desired communication receiver and/or to establish a direct connection between the desired communication receiver and a communication transmitter/said terminal.

30 4. A terminal according to claims 1 - 3, c h a r a c -  
t e r i z e d in that said terminal additionally comprises speech recognition means adapted to analyze and interpret said sound for recording and/or said transmission data to identify one or more commands.

5. A terminal according to claims 1 - 4, c h a r a c -  
t e r i z e d in that said communications means for near  
field communication are adapted to communicate in the  
5 form of one or more of:

- an RF communications protocol such as e.g. Bluetooth,
- an infrared communications protocol, or
- another wireless communications protocol.

10 6. A terminal according to claims 1 - 5, c h a r a c -  
t e r i z e d in that said suitable data format is a  
compressed data format.

15 7. A terminal according to claims 1 - 6, c h a r a c -  
t e r i z e d in that said terminal is an ear telephone  
which comprises means for capturing sound for said re-  
cording via the cheek-bone and the soft tissue in the  
auditory canal of a user.

20 8. A terminal according to claims 1 - 6, c h a r a c -  
t e r i z e d in that said terminal is a headset  
comprising

- a housing (502) comprising the converting means  
(102), the wireless communication means (104), and  
25 the protocol means (103),
- an earpiece (503) secured to the housing (502)  
comprising means for reproducing sound on the basis  
of the first electrical signal,
- a brace (504) secured to the housing (502) at one  
30 end and with a sound capturing unit (505) for  
capturing sound for transmission in the form of a  
second electrical signal located at the other end of  
the brace (504).

9. A system for Internet/network telephony, c h a r a c t e r -  
i z e d in that the system comprises
- a portable communications terminal according to any  
5 one of claims 1 - 8,
  - a connecting unit adapted to establish a connection  
to a network and/or the Internet,
  - a service server connected to the Internet and/or a  
10 network, said server comprising one or more databases  
comprising information related to potential desired  
communication receivers and/or transmitters, said  
server being adapted to pass on information concern-  
ing the IP address of a desired communication re-  
15 ceiver and/or establish a direct connection between  
the desired communication receiver and a communica-  
tion transmitter/said terminal.
10. A system according to claim 9, c h a r a c t e r -  
i z e d in that said system additionally comprises  
20 speech recognition means adapted to analyze and interpret  
data representing sound to identify one or more commands.
11. A method for Internet/network telephony comprising  
the steps of
- 25 • reproducing sound on the basis of a first electrical  
signal and recording sound resulting in a second  
electrical signal,
  - converting said second electrical signal into trans-  
mission data, representing sound for transmission, in  
30 a suitable data format, and converting received data,  
representing received sound, in said suitable data  
format into said first electrical signal, and
  - handling/control of communication with said received  
and transmission data in accordance with a

standardized Internet/network protocol, such as e.g. TCP/IP, and embedding and extracting said transmission and received data, respectively, in/from a data packet format according to said standardized Internet/network protocol,

characterized in that said method further comprises

- wireless near field communication of said received and/or transmission data in a wireless data format with a connecting unit adapted to establish a connection to a network and/or the Internet according to said standardized Internet/network protocol
- embedding/extracting packets of said data packet format in/from said wireless data format.

12. A method according to claim 11, characterized in that said method communicates additional information and/or data with said connecting unit, and that additional information and/or data comprises one or more of:

- an IP address of a communication receiver,
- an IP address of a communication transmitter/said terminal,
- an IP address of at least one connecting unit,
- an IP address of a service server,
- TCP/IP packets,
- speech mails,
- commercials,
- music,
- stock exchange and financial news,
- chat-lines,
- chat-rooms,
- telephone meetings.

13. A method according to claims 11 - 12, c h a r a c -  
t e r i z e d in that said method establishes a connec-  
tion to a service server on said network and/or the  
5 Internet via said connecting unit, so that information  
concerning a desired communication receiver may be trans-  
ferred to the server, said server being adapted to pass  
on information concerning the IP address of the desired  
communication receiver and/or to establish a direct con-  
10 nection between the desired communication receiver and a  
communication transmitter/said terminal.

14. A method according to claims 11 - 13, c h a r a c -  
t e r i z e d in that said method additionally comprises  
15 speech recognition for analysis and interpretation of  
said sound for recording and/or said transmission data to  
identify one or more commands.

15. A method according to claims 11 - 14, c h a r a c -  
20 t e r i z e d in that said communications means for near  
field communication communicate in the form of one or  
more of:

- an RF communications protocol such as e.g. Bluetooth,
- an infrared communications protocol, or
- 25 • another wireless communications protocol.

16. A method according to claims 11 - 15, c h a r a c -  
t e r i z e d in that said suitable data format is a  
compressed data format.

30

17. A method according to claims 11 - 16, c h a r a c -  
t e r i z e d in that said method is used in an ear  
telephone which comprises means for capturing sound for


said recording via the cheek-bone and the soft tissue in the auditory canal of a user.



18. A method according to claims 11 - 16, c h a r a c -  
5 t e r i z e d in that said method is used in a headset comprising

- a housing comprising converting means, wireless communication means, and protocol means,
- 10 • an earpiece secured to the housing comprising means for reproducing sound on the basis of the first electrical signal,
- a brace secured to the housing at one end and with a sound capturing unit for capturing sound for transmission in the form of a second electrical  
15 signal located at the other end of the brace.

19. A computer-readable medium comprising a program written thereon, wherein the program, when being executed, causes one or more computers or CPUs to perform  
20 the method according to claims 11 - 18.

1/6

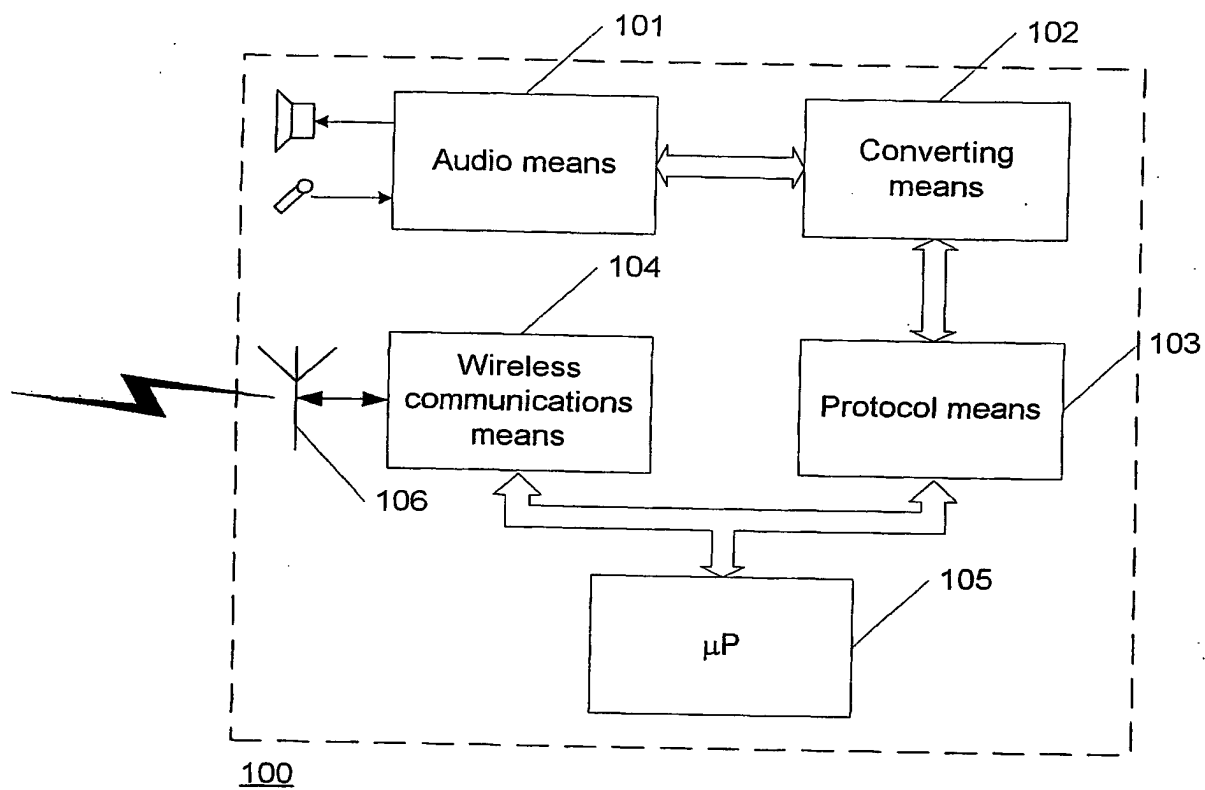**Figure 1**

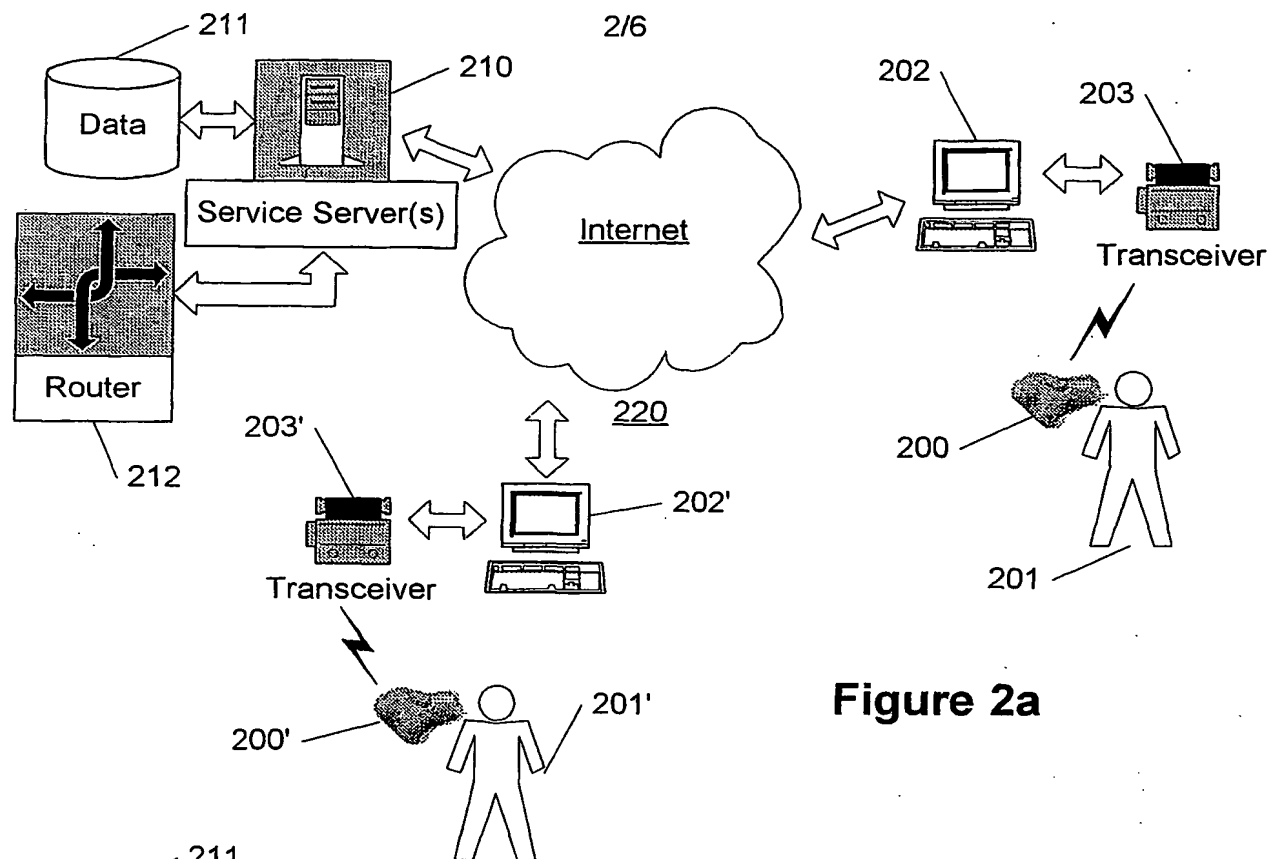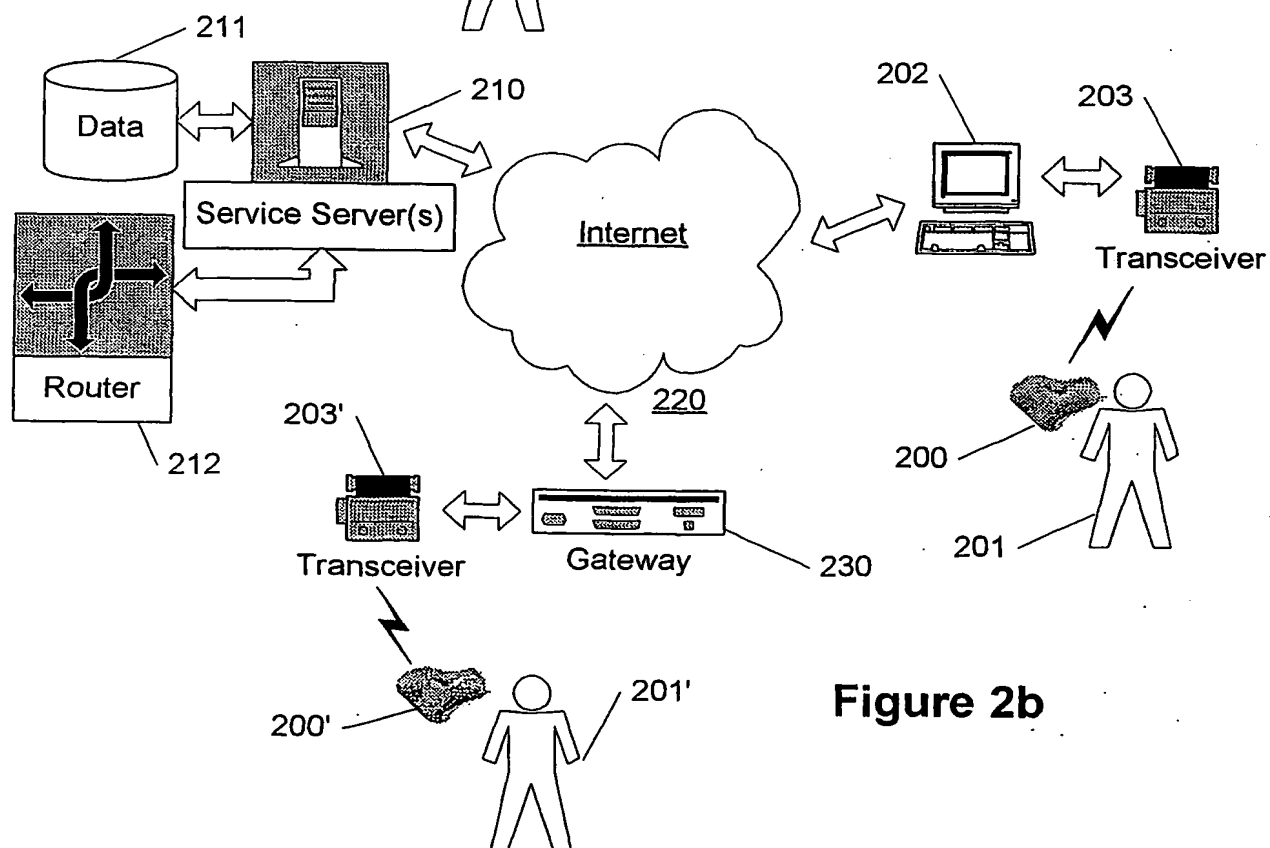**Figure 2a****Figure 2b**

3/6

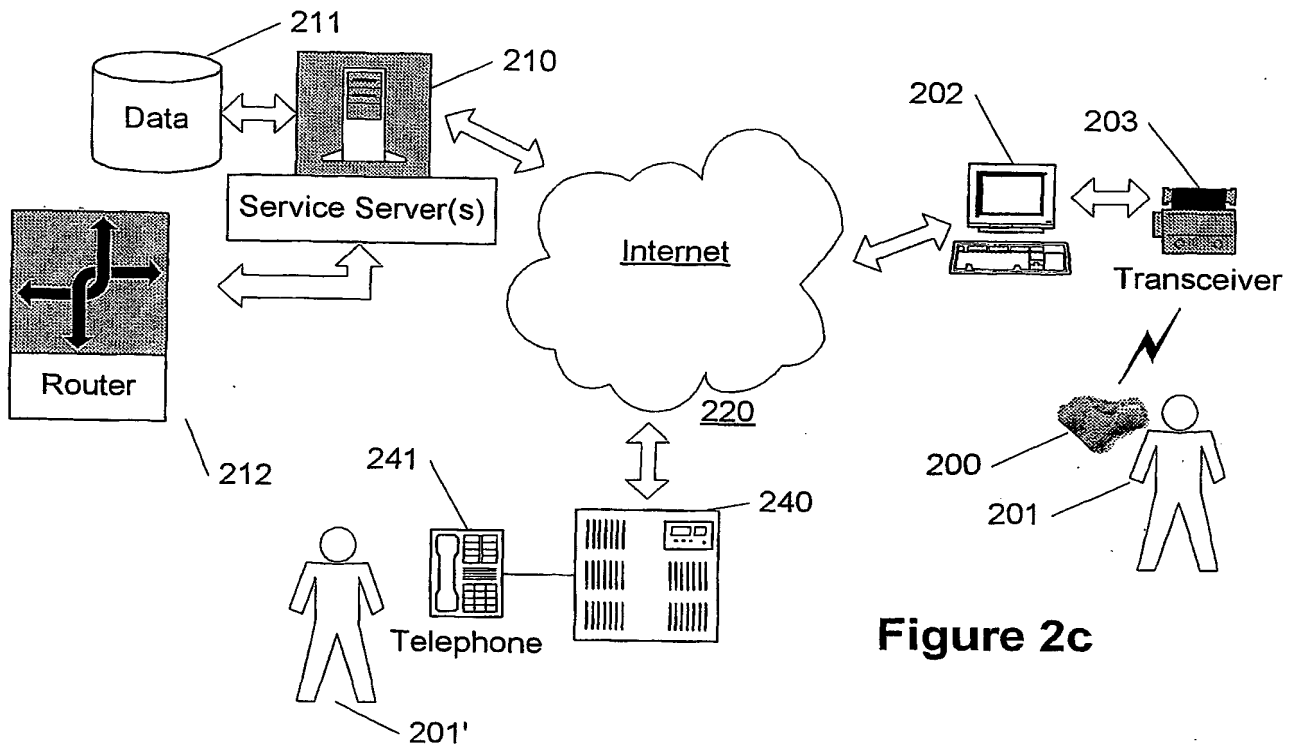


Figure 2c

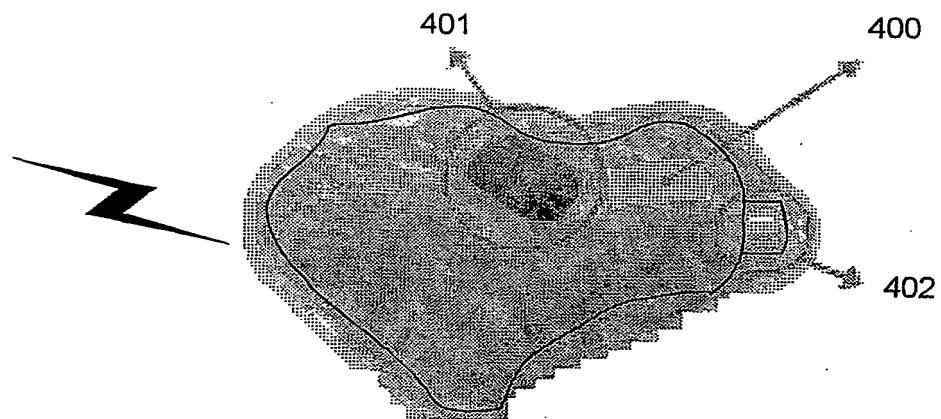


Figure 4



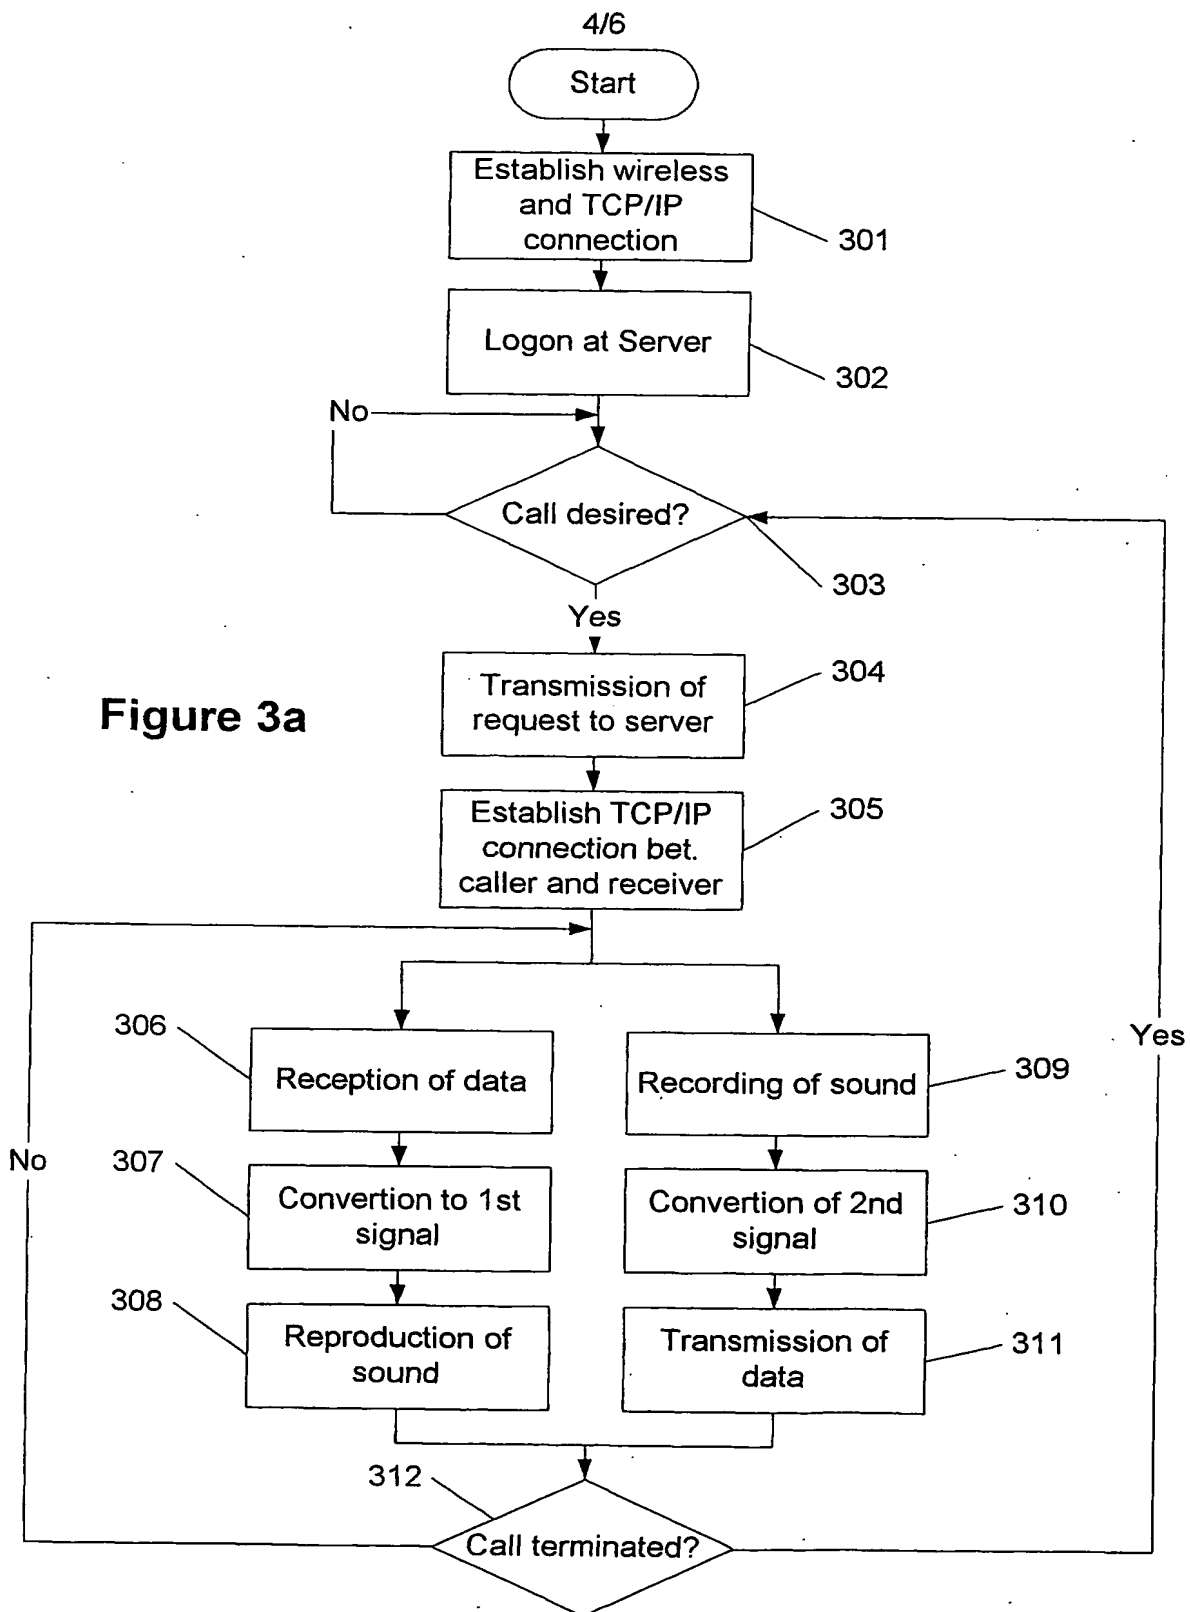


Figure 3a



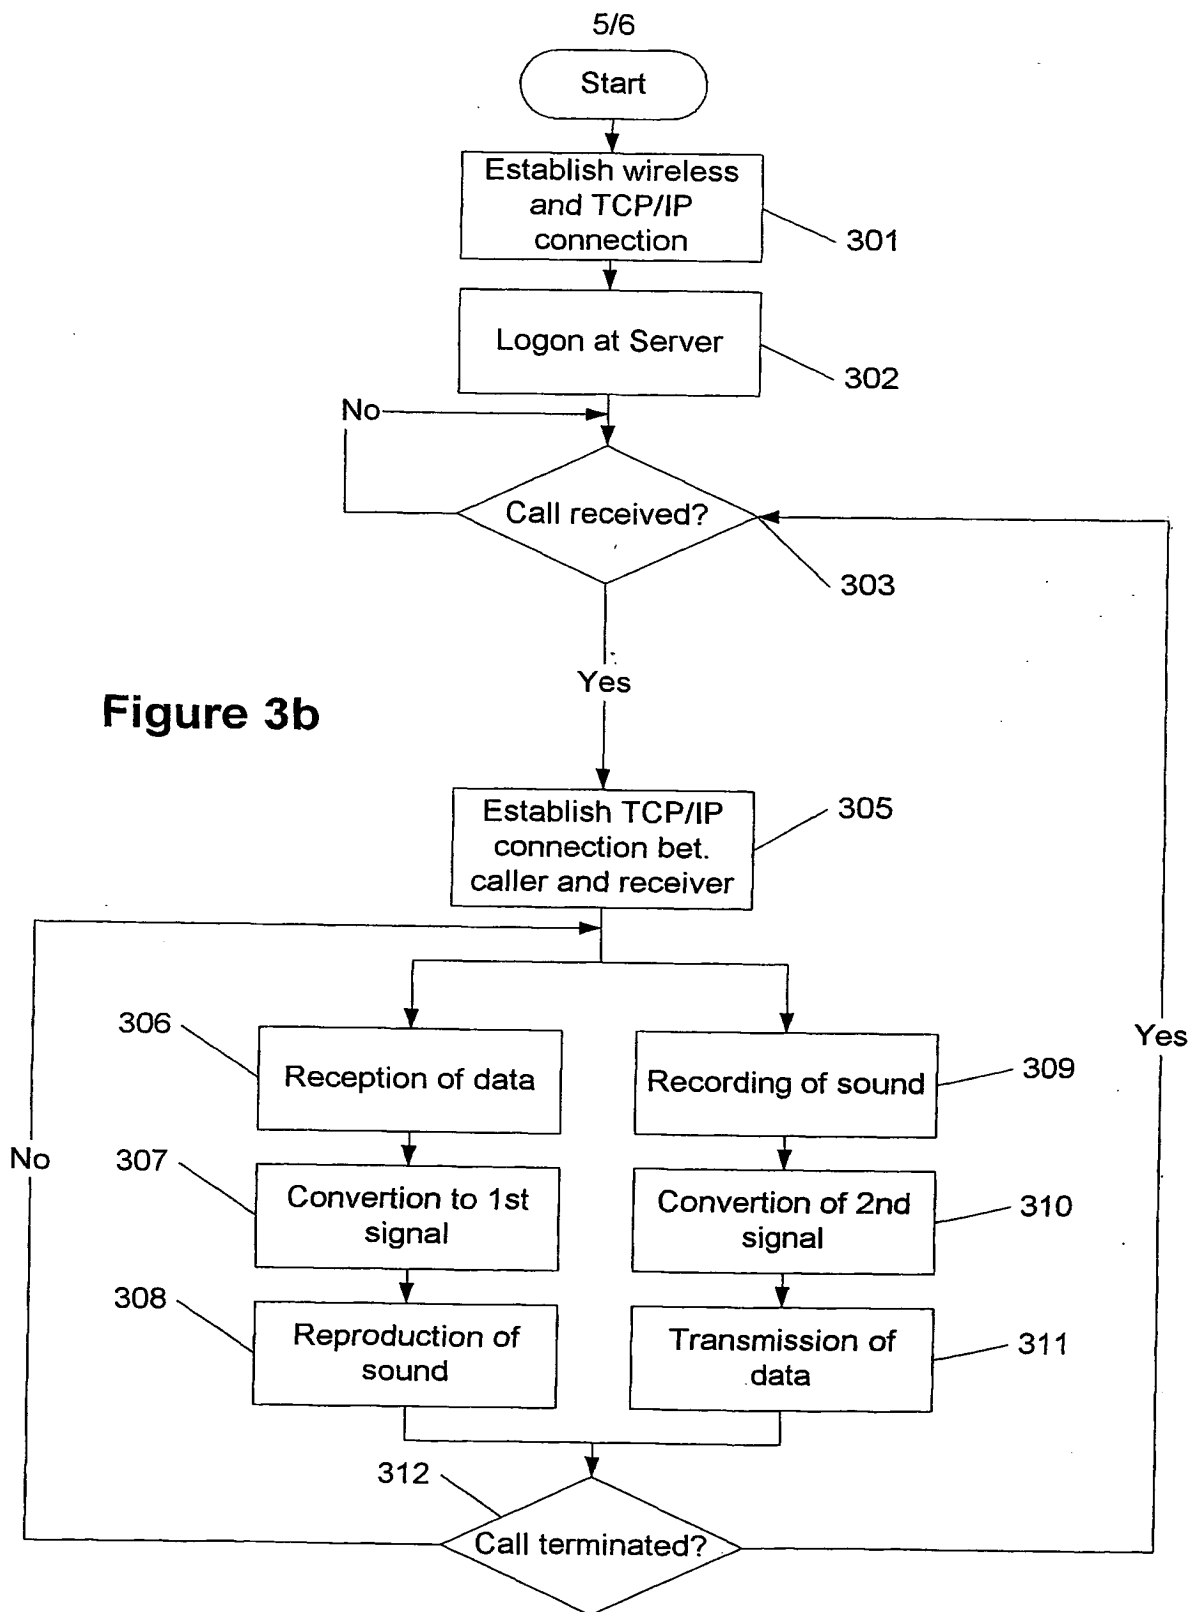

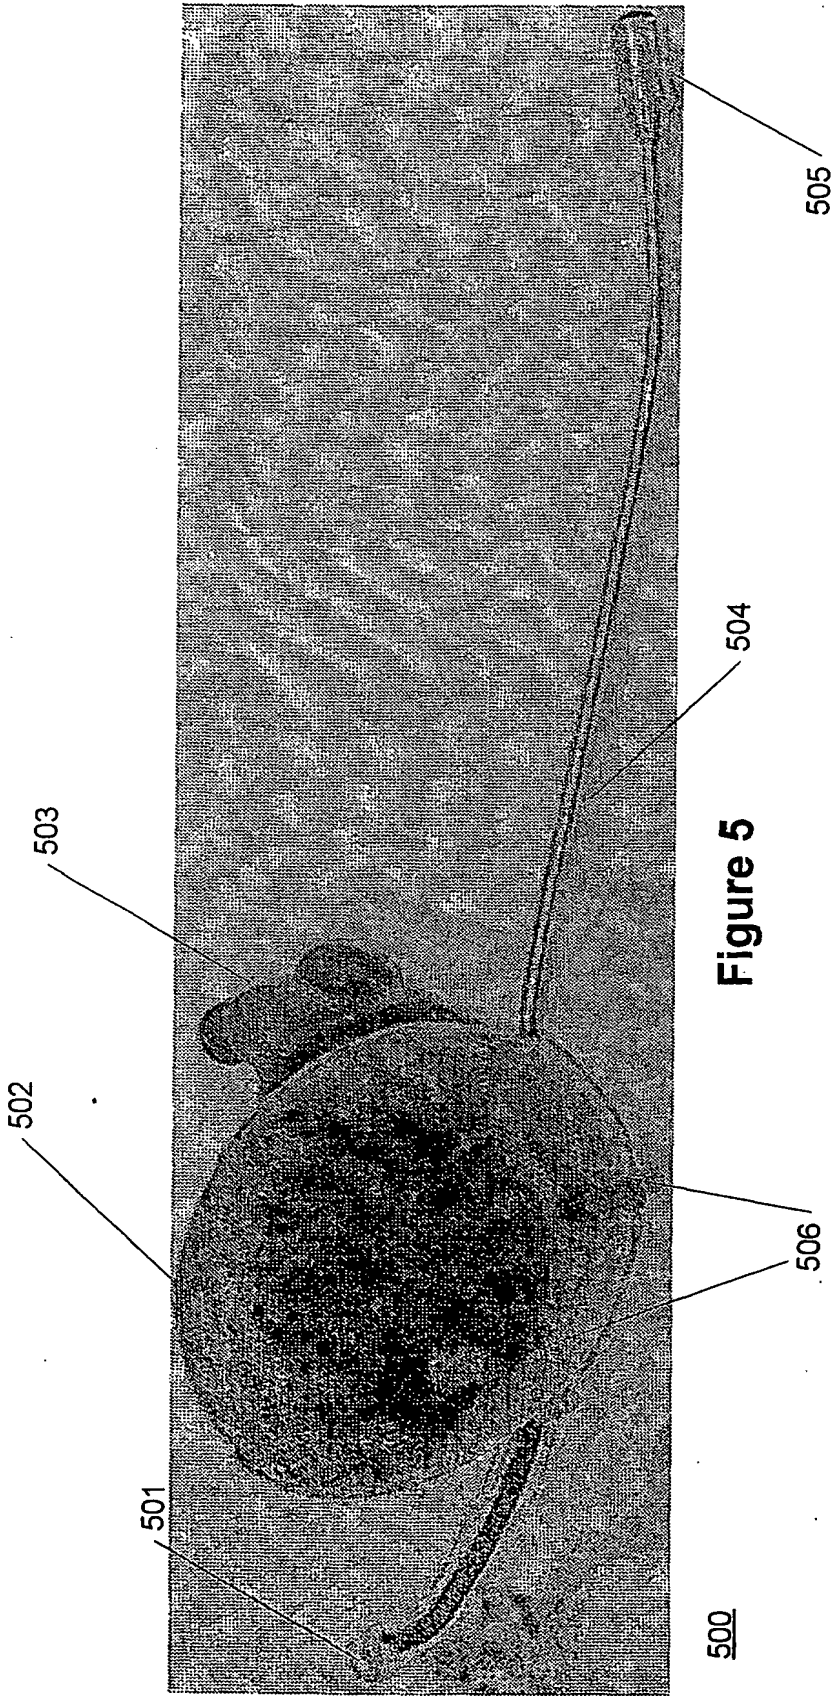

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number  
**WO 02/19666 A3**

(51) International Patent Classification<sup>7</sup>: **H04M 1/00, 7/00**

(74) Agent: **HOFMAN-BANG ZACCO A/S**; Hans  
Bekkevold; Allé 7, DK-2900 Hellerup (DK).

(21) International Application Number: **PCT/DK01/00571**

(22) International Filing Date:  
3 September 2001 (03.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PA 2000 01308 1 September 2000 (01.09.2000) DK

(71) Applicant (*for all designated States except US*):  
**NEXTLINK TO A/S** [DK/DK]; Sandtoften 10, DK-2820  
Gentofte (DK).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HEIN-MAG-  
NUSSEN, Jon** [DK/DK]; Lillegrund 4, 2.th., DK-2300  
Copenhagen S (DK). **KUHLMANN, Peer** [DK/DK];  
Strandvangsvej 16, DK-2650 Hvidovre (DK). **HANSEN,  
Lars Stenfeldt** [DK/DK]; Strandvejen 315B, DK-2920  
Charlottenlund (DK).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT  
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE  
(utility model), DK, DK (utility model), DM, DZ, EC, EE,  
EE (utility model), ES, FI, FI (utility model), GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA,  
UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

Declaration under Rule 4.17:

-- of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: A COMMUNICATIONS TERMINAL, A SYSTEM AND A METHOD FOR INTERNET/NETWORK TELEPHONY

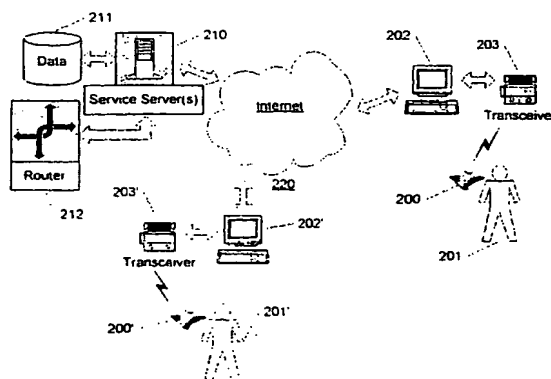

(57) Abstract: This invention relates to an electronic portable communications terminal for Internet telephony and comprising audio means adapted to reproduce sound on the basis of a first electrical signal and to record sound resulting in a second electrical signal, converting means adapted to convert said second electrical signal into transmission data, representing sound for transmission, in a suitable data format and to convert received data, representing received sound, in said suitable data format into said first electrical signal, and communications means for wireless near field communication of said received and transmission data with a connecting unit adapted to establish a connection to a network and/or the Internet, said terminal additionally comprising protocol means adapted to handle/control communication of said received and transmission data in accordance with a TCP/IP protocol in connection with said wireless near field communication. This provides a communications terminal which enables a network and/or the Internet for the transfer of digitized speech, sounds, etc., thereby achieving great economic savings. Also, the flexibility is increased with respect to wireless communication/coupling with the network and/or the Internet without any need for specialized equipment and functionality. The invention moreover relates to a system and a method for Internet telephony as well as to a computer-readable medium having a program for causing a computer to perform the method.

WO 02/19666 A3



**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

2 May 2002

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 01/00571

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04M1/00 H04M7/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 009 469 A (HUTTON GLENN W ET AL) 28 December 1999 (1999-12-28) column 5, line 60 - line 67 column 10, line 11 - line 19	1-6, 8-16, 19
A	column 10, line 34 - line 40 column 34, line 36 - line 44 figures 5,6 ---	7, 17
X	GB 2 345 613 A (IBM) 12 July 2000 (2000-07-12)	1-6, 8-16, 19
A	page 3, line 20 - line 40 page 9, line 29 - line 36 ---	7, 17
A	WO 98 57508 A (TELIA AB) 17 December 1998 (1998-12-17) cited in the application page 1, line 27 -page 3, line 31 ---	1-19
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*B\* document member of the same patent family

Date of the actual completion of the international search

22 February 2002

Date of mailing of the international search report

19/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schweitz, M

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 01/00571

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	WO 01 37524 A (ERICSSON TELEFON AB L M) 25 May 2001 (2001-05-25) claims 1-15 -----	8, 18
A	US 6 016 347 A (MAGNASCO JOHN HARRY ET AL) 18 January 2000 (2000-01-18) column 3, line 16 - line 24 -----	8, 18
A	US 5 113 428 A (FITZGERALD ROBERT) 12 May 1992 (1992-05-12) the whole document -----	8, 18
A	US 5 974 043 A (SOLOMON YORAM) 26 October 1999 (1999-10-26) -----	
A	EP 0 766 490 A (NOKIA MOBILE PHONES LTD) 2 April 1997 (1997-04-02) -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 01/00571

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6009469	A	28-12-1999	US 6108704 A 22-08-2000
		AU 727702 B2 21-12-2000	
		AU 7247696 A 30-04-1997	
		BR 9610980 A 15-06-1999	
		CA 2231127 A1 17-04-1997	
		CN 1197567 A 28-10-1998	
		EP 0852868 A2 15-07-1998	
		JP 11515148 T 21-12-1999	
		WO 9714234 A2 17-04-1997	
		US 6131121 A 10-10-2000	
		US 6185184 B1 06-02-2001	
		US 6275490 B1 14-08-2001	
GB 2345613	A	12-07-2000	AU 1872600 A 24-07-2000
		EP 1142365 A1 10-10-2001	
		WO 0041416 A1 13-07-2000	
		JP 2000236353 A 29-08-2000	
WO 9857508	A	17-12-1998	EP 0990353 A1 05-04-2000
		NO 996063 A 10-02-2000	
		SE 9702266 A 14-12-1998	
		WO 9857508 A1 17-12-1998	
WO 0137524	A	25-05-2001	AU 2505301 A 30-05-2001
		WO 0137524 A1 25-05-2001	
US 6016347	A	18-01-2000	CN 1299550 T 13-06-2001
		EP 1060606 A1 20-12-2000	
		WO 9945686 A1 10-09-1999	
US 5113428	A	12-05-1992	NONE
US 5974043	A	26-10-1999	AU 3951797 A 02-04-1998
		WO 9811703 A2 19-03-1998	
EP 0766490	A	02-04-1997	FI 954639 A 30-03-1997
		EP 0766490 A2 02-04-1997	
		JP 9130405 A 16-05-1997	
		US 5956331 A 21-09-1999	

**THIS PAGE BLANK (USPTO)**